

537,424

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number  
**WO 2004/052465 A1**

(51) International Patent Classification<sup>7</sup>: **A62B 35/04**

(21) International Application Number:  
PCT/GB2003/005313

(22) International Filing Date: 5 December 2003 (05.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0228524.5 6 December 2002 (06.12.2002) GB

(71) Applicant (for all designated States except US): **LATCHWAYS PLC** [GB/GB]; Hopton Park, Devizes, Wiltshire SN10 2JP (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JONES, Karl**

[GB/GB]; Latchways PLC, Hopton Park, Devizes, Wiltshire SN10 2JP (GB). **FLUX, Peter** [GB/GB]; Latchways Plc, Hopton Park, Devizes, Wiltshire SN10 2JP (GB).


(74) Agent: **REES, Alexander, Ellison; Urquhart-Dykes & Lord LLP**, 30 Welbeck Street, London W1G 8ER (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: **SAFETY LINE TRAVELLER AND SUPPORT**

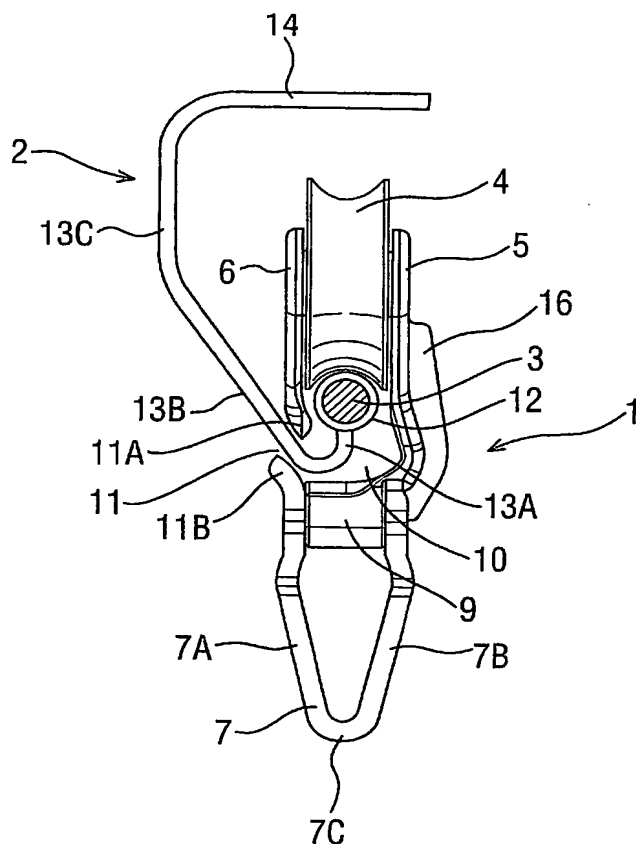

(57) **Abstract:** A traveller for a fall arrest system comprises a body having a passage therethrough, a slot narrower than the passage linking the passage to the exterior of the body, and a load member suitable to attach the traveller to fall safety equipment. The slot is formed between an inner gate extending outwardly relative to the passage and an outer gate extending inwardly relative to the passage, the inner gate and outer gate having respective opposed convex surfaces defining the slot between them. The traveller is arranged such that when the traveller is mounted on a support the inner gate and outer gate lie on a common radius of respective concentric circles about the support.

WO 2004/052465 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG):

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*